




# 3-Phase Incoming Kit


## 4 Pole RCD (63A to 100A) (30mA , 100mA , 300mA , 500mA)

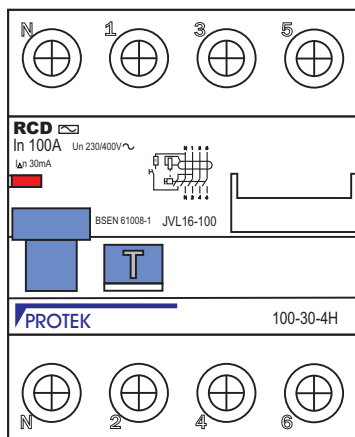

RCD Part No 100-30-4


### Parts List

- 1 - 4 Pole RCD eg (100-30-4) 100A-30mA
- 1 - Set Copper Links (TPKS3125)
- 1 - 4 Mod Face Plate (TPM04)
- 1 - Neutral Wire (TPKS16N)

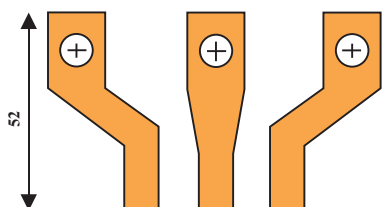


3 Copper Links

Part No TPKS3125

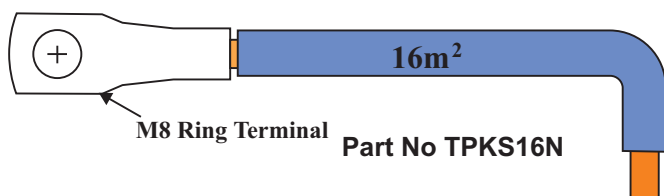

M8 Ring Terminal

Part No TPKS16N

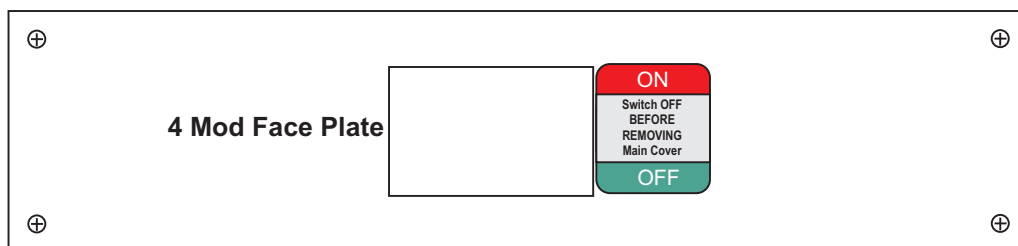


Part No TPM04



# Incomer Arrangements

## 4 Pole RCD

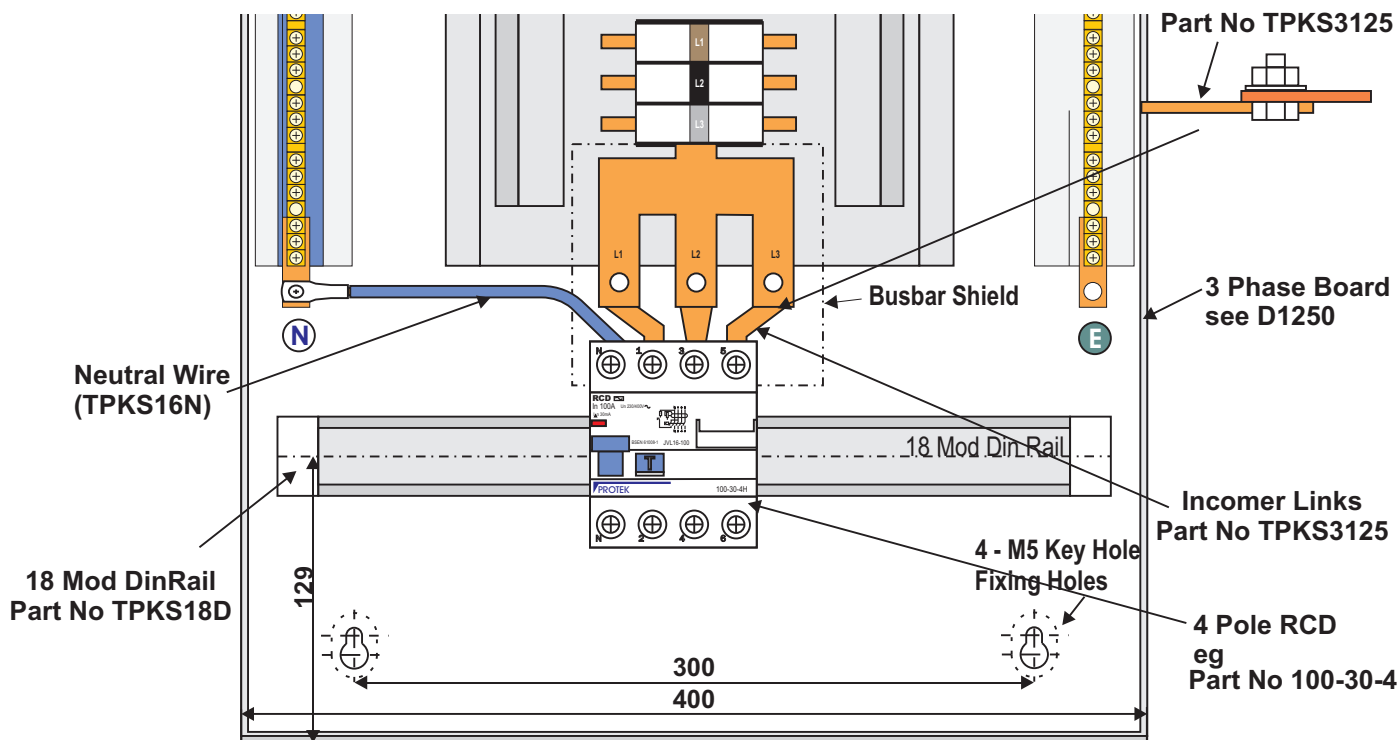

### Fitting Incomer

- 1 - Lay 3-Phase Unit on a flat surface.
- 2 - Open Door and slide it up off its hinges.
- 3 - Fix face plate (TPM04) to cover plate (off set to the left).
- 4 - Remove 3-Phase Unit Cover Plate.
- 5 - Remove BusBar Shield, and trim opening to suit 4 Pole RCD.
- 6 - Place RCD on DinRail in position shown.
- 7 - Place Links (TPKS3125) in isolator terminals and fix to underside of Busbar using M8 bolts provided with unit.  
Note: Loosely tighten terminals and bolt fixings at this point.
- 8 - Place Neutral Wire (TPKS16N) in left terminal of RCD, and Fix to Neutral bar using bolt provided with unit.
- 9 - While Terminals and Bolt fixings are loose, place cover plate over unit and adjust RCD position as required.
- 10 - Firmly tighten all terminals and bolts and fit BusBar shield.

**3Phase Board Not Included**