



PROTEK

IP40 Metalclad Garage Unit

Specification

Powder Coated Epoxy Resin Finish,
 Manufactured in the UK to BSEN 60439-3
 Degree of protection IP3X to BSEN 60529
 Load break & load make isolator or 30mA RCD*
 Cutaway sides for ease of installation
 Wall mountable
 Double pole isolation for both live and neutral
 Ample cabling space
 Incoming cable connects to isolator or RCD, outgoing from
 mcb and isolator or RCD
 Pre-punched knockouts 20mm and 25mm
 Keyhole slot to allow the unit to be mounted level on the wall



SC45RDCM
(Less MCB)

****Other trip ratings are available, please contact our sales office for***

IP40 Metalclad Shower Unit


Incomer	Description	Part Number
100A	100A DP isolator & single mcb	SC100M
25A	25A 30mA RCD & single mcb	SC25RDCM
40A	40A 30mA RCD & single mcb	SC45RDCM
63A	63A 30mA RCD & single mcb	SC63RDCM
80A	80A 30mA RCD & single mcb	SC80RDCM
100A	100A 30mA RCD & single mcb	SC100RDCM

To order your unit choose from one of the above, pick the mcb rating you require and add it to the part number i.e. a shower unit with a 100A isolator incomer and a 20A mcb would be a SC100M/20. MCB ratings available are shown overleaf.



PROTEK

Dimension

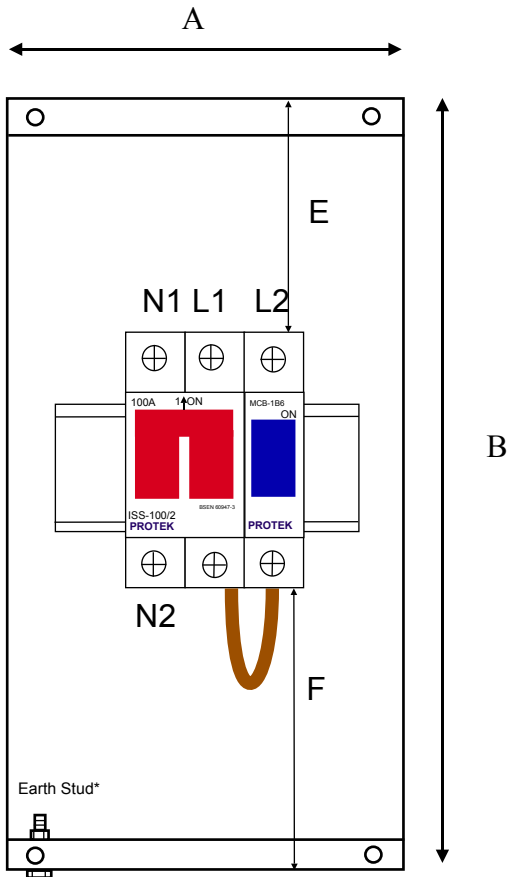

Dimension

A	105mm
B	200mm
Depth	62mm
E	57mm
F	57mm

Terminations

L1 and N1	Mains incoming supply
L2 and N2	Outgoing supply

MCB's

6A	MCB-106B
10A	MCB-110B
16A	MCB-116B
20A	MCB-120B
25A	MCB-125B
32A	MCB-132B
40A	MCB-140B
50A	MCB-150B
63A	MCB-163B

**Earth stud for connecting suitably rated earth cable.*

phone **01543 46 75 75**
 fax **01543 46 23 70**
 email **sales@protekuk.co.uk**



PROTEK
 DSIFSM0001