




DIN Rail Isolators for industrial/residential applications

Single, Double, Three and Four Pole variants
230/400v AC 50/60Hz
160A to 250A

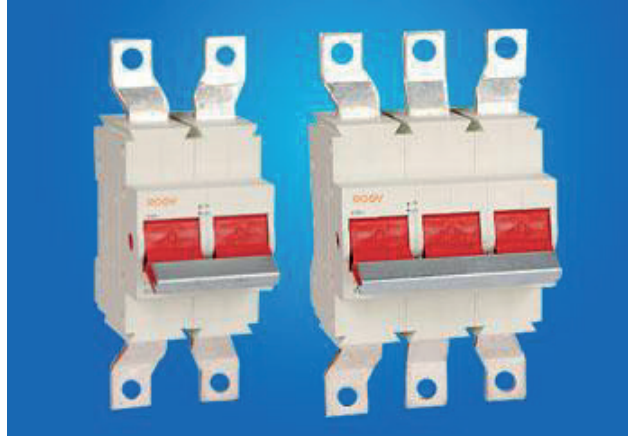


Product Codes

Rating	Single Pole	Double Pole	Three Pole	Four Pole
160A	ISS-160/1	ISS-160/2	ISS-160/3	ISS-160/4
200A	ISS-200/1	ISS-200/2	ISS-200/3	ISS-200/4
250A	ISS-250/1	ISS-250/2	ISS-250/3	ISS-250/4

Specification

Standard	IEC60947-3
Switch Type	Switch-disconnector , load make & break
Voltage	230/400V
Frequency	50Hz-60Hz
Current Type	AC
Rated Current	160A, 200A, and 250A
Short Circuit Capability	3000A
Endurance	>10000
Application	Residential/Industrial

Wiring Diagrams

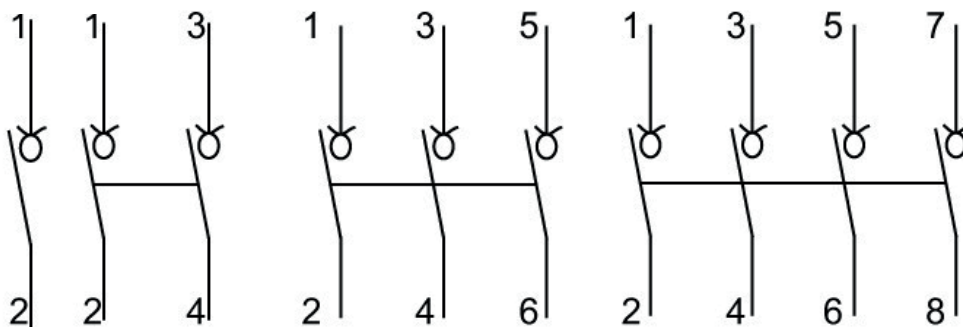




PROTEK

Technical Data

Number of poles:	1P, 2P, 3P, 4P
Rated current(A):	160A, 200A and 250A
Rated voltage:	230/400V AC
Rated frequency:	50/60Hz
Rated short-circuit making capacity:	3kA
Rated withstand current:	1.8kA within 1sec
Electro-mechanical endurance:	10000 cycles
Connection capacity:	8mm bolts
Operating temperature	-5°C to +40°C
Installation class	II or III
Pollution class	2
Humidity	<50% at 40°C and no more than 90% at 25°C
Mounting	On symmetrical DIN Rail 35.5mm (panel mounting)
Torque:	3.5Nm

Front elevation

Side elevation

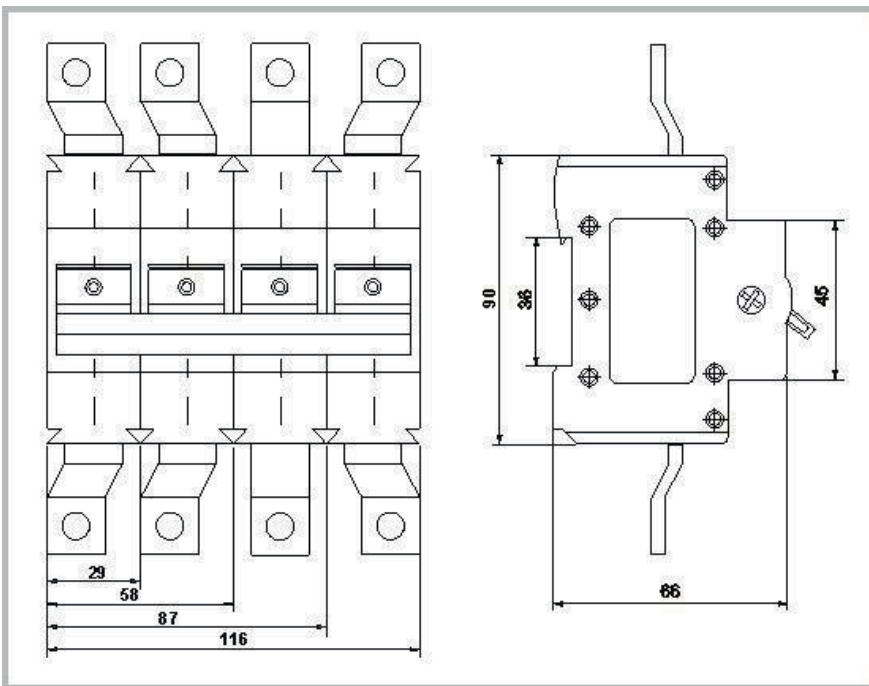

phone **01543 46 75 75**

fax **01543 46 23 70**

email **orders@protekuk.co.**



PROTEK