




3-Phase Incoming Kit


3 Pole MCB (80A to 125A - 'C' or 'D' Curve)

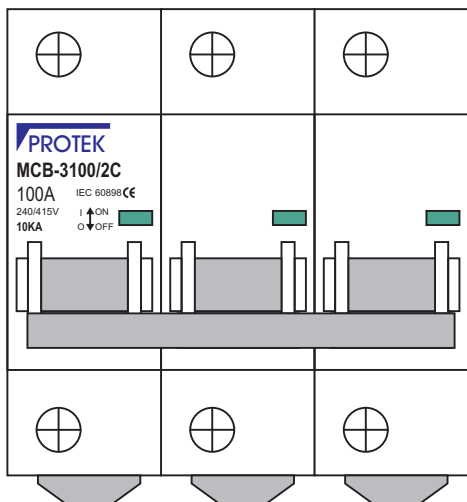


Part No ISS-MCB-3100/2C

Parts List

- 1 - 3 Pole MCB eg (MCB-3100/2C 100A)
- 3 - Busbar Links (TPKM16L)
- 1 - 5 Module Face Plate (TPM05)

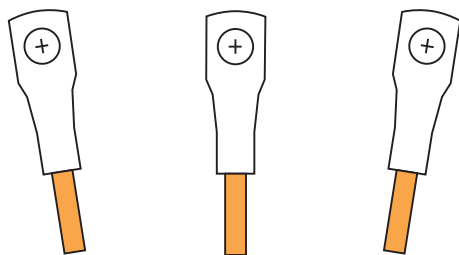

3 - Busbar Links (TPKM16L)

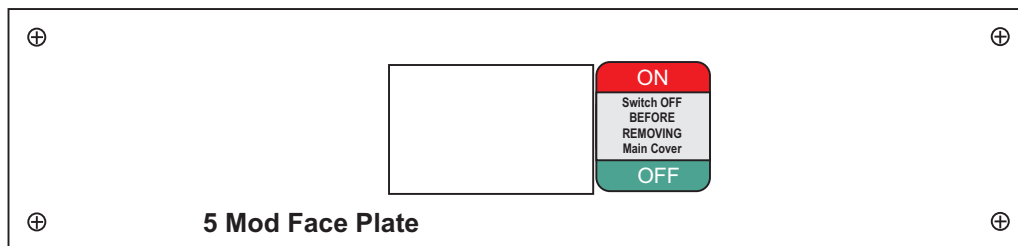


5 Mod Face Plate

Part No TPM05



3-Phase Incoming Kit

3 Pole MCB (80 -100A)

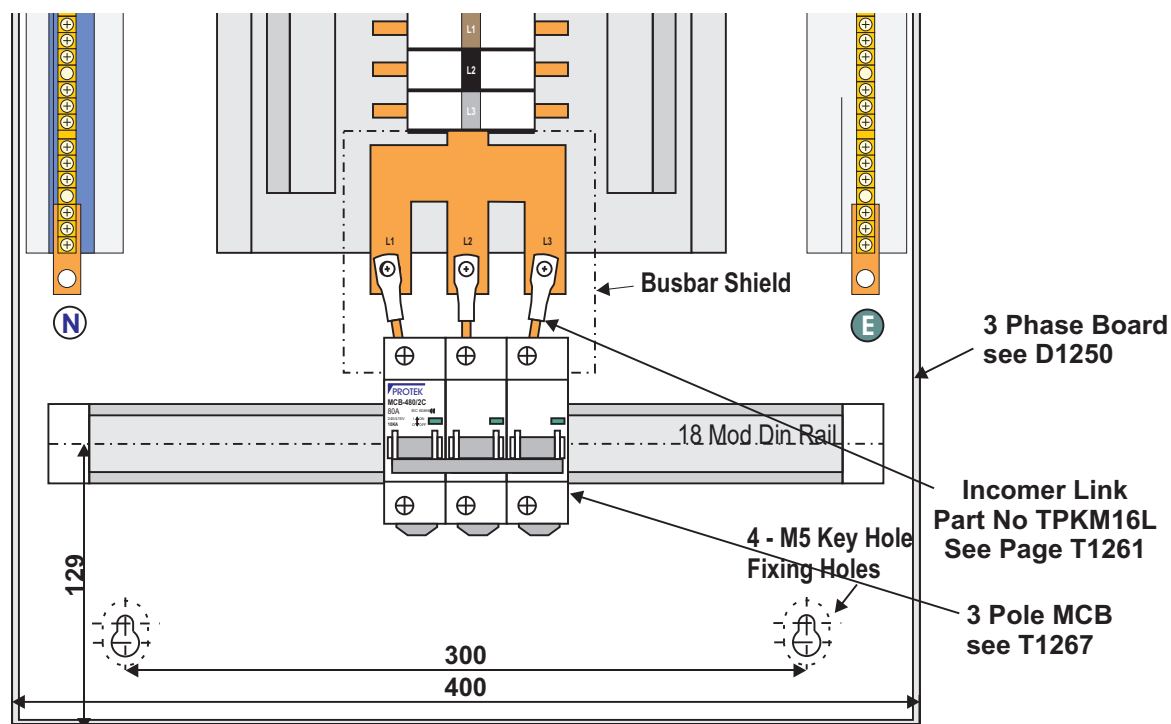

Fitting Incomer

- 1 - Lay 3-Phase Unit on a flat surface.
- 2 - Open Door and slide it up off its hinges.
- 3 - Fix face plate (TPM05) to cover plate.
- 4 - Remove 3-Phase Unit Cover Plate.
- 5 - Remove BusBar Shield.
- 6 - Place MCB on DinRail in position shown.
- 7 - Place Links (TPKM16L) in MCB terminals and fix to Busbar using M8 bolts provided with unit.
Note: Loosely tighten terminals and bolt fixings at this point.
- 8 - While Terminals and Bolt fixings are loose, place cover plate over unit and adjust MCB position as required.
- 9 - Firmly tighten all terminals and bolts and fit BusBar shield.

3Phase Board Not Included