

Enclosed

# RCBOs



# Enclosed RCBOs

## Specification

- ▶ Powder Coated Epoxy Resin Finish RAL 2002
- ▶ Designed in the UK to BS EN 60439-3 1991
- ▶ Manufactured and tested to BS EN 60439 parts 1 & 2
- ▶ Degree of protection IP30 to BS EN 60529
- ▶ Blank gland plates for ease of installation
- ▶ Key hole slots for ease of fixing
- ▶ Fully adjustable current setting of MCCB
- ▶ Fully adjustable trip current setting 30mA, 50mA, 100mA, 300mA, 500mA
- ▶ Adjustable time setting for trip 2mS, 33mS, 0.5S, 1.5S, 3S and 5S

Fully Adjustable  
4 Pole RCBO  
C/W Enclosure



## Features

- ▶ Designed and built in UK
- ▶ Nine current ratings with adjustable current settings
- ▶ Two enclosure sizes with optional cable spreader boxes
- ▶ Blank gland plates top and bottom
- ▶ Variable tripping currents from 30mA up to 500mA
- ▶ Adjustable time settings 2mS to 5s

## Benefits

- ▶ UK help desk for any problems
- ▶ Protection for any three phase circuit from 40A to 800A
- ▶ Ample cabling space
- ▶ Glanding made easier no knockouts to avoid
- ▶ Protect domestic, industrial and agricultural sites
- ▶ Guarantee discrimination with RCDs down stream

## Note

GRP enclosed version for  
TT systems available\*

\*Phone our sales office for price and availability

- ▶ IP30 Pre-wired ready to use
- ▶ 3 year warranty
- ▶ Fully tested prior to despatch
- ▶ Fully adjustable both current and tripping current


### Enclosed RCBOs

Part Number	Description	Current Range	Height mm	Width mm	Depth mm
RCBO3-063TSM	Four Pole 63A RCBO	40A-63A	510	400	100
RCBO3-100TSM	Four Pole 100A RCBO	63A-100A	510	400	100
RCBO3-125TSM	Four Pole 125A RCBO	79A-125A	510	400	100
RCBO3-160TSM	Four Pole 160A RCBO	101A-160A	510	400	100
RCBO3-200TSM	Four Pole 200A RCBO	126A-200A	510	400	100
RCBO3-250TSM	Four Pole 250A RCBO	158A-250A	510	400	100
RCBO3-400TSM*	Four Pole 400A RCBO	252A-400A	510	655	160
RCBO3-630TSM*	Four Pole 630A RCBO	397A-630A	510	655	160
RCBO3-800TSM*	Four Pole 800A RCBO	504A-800A	510	655	160

\*Optional cable spreader boxes

### Cable Spreader Boxes

Part Number	Description	Height mm	Width mm	Depth mm
MCSB3	Cable spreader box 255mm	255	655	160
MCSB6	Cable spreader box 510mm	510	655	160

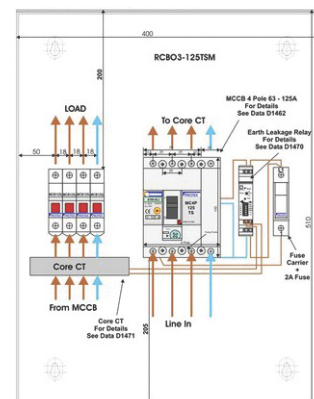

## Protek Electronics Limited

Phoenix House, Phoenix Road, Hawks Green, Cannock, Staffordshire, WS11 7LR

Tel: 01543 46 75 75 Fax: 01543 46 23 70 Email: sales@protekuk.co.uk Web: www.protekuk.co.uk Twitter - @protekuk Facebook - facebook.com/Protek.Electronics